




# SPG ATEX



## DES grommets - large

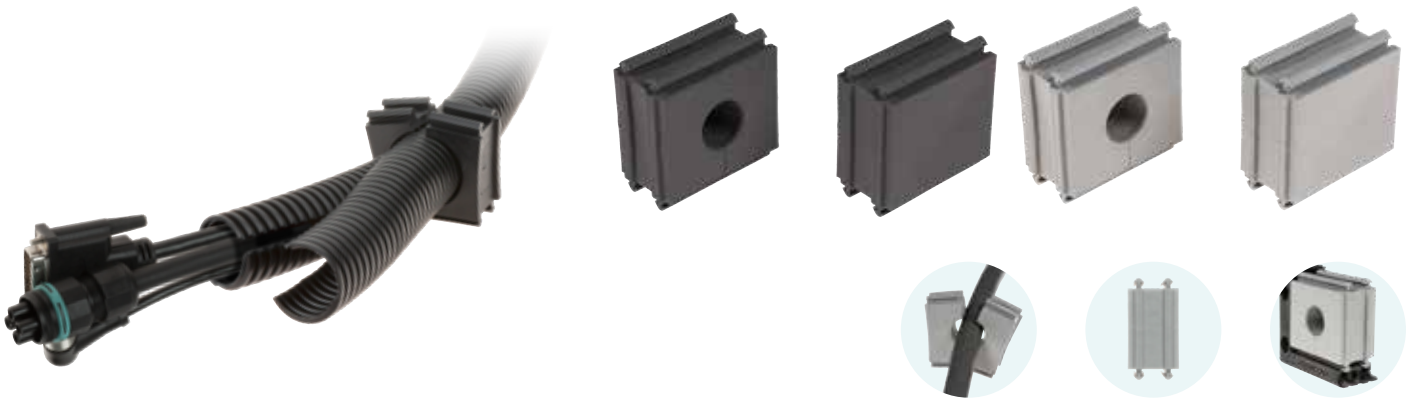

### FEATURES

- Grommets for cables with and without connectors or for corrugated conduits from 17 to 35 mm diameter
- 2 blind versions available
- UL94-V0 for both grey and black

The SPG grommets are designed for cables with or without connectors or for corrugated conduits with diameter from 17 to 35mm.

**SPG ATEX series can be used in zone 2 and 22.**

**Material:** TPE, halogen-free, silicone-free

**Flammability:** self-extinguishing acc. to UL94-V0 (grey or black)


**Temperature:** -40°C... +110°C (static)

*Material successfully tested for UV and water exposure resistance according to UL 746C related procedures, suitable for outdoor applications.*

### RELATED PRODUCTS

- DES 24 A • DES 10 A • DESPRED A
- DES 16 A • DES Q A

### Dimensions (mm)

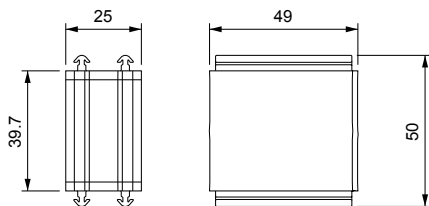

Model	Code	Model	Code	Ø Cable min/max (mm)	Pcs (/pack)
<b>SPG 0GA</b>	1731322000	<b>SPG 0BA</b>	1731322020	"Blind"	
<b>SPG 17GA</b>	1731322117	<b>SPG 17BA</b>	1731322217	17-18	
<b>SPG 18GA</b>	1731322118	<b>SPG 18BA</b>	1731322218	18-19	
<b>SPG 19GA</b>	1731322119	<b>SPG 19BA</b>	1731322219	19-20	
<b>SPG 20GA</b>	1731322120	<b>SPG 20BA</b>	1731322220	20-21	
<b>SPG 21GA</b>	1731322121	<b>SPG 21BA</b>	1731322221	21-22	
<b>SPG 22GA</b>	1731322122	<b>SPG 22BA</b>	1731322222	22-23	
<b>SPG 23GA</b>	1731322123	<b>SPG 23BA</b>	1731322223	23-24	
<b>SPG 24GA</b>	1731322124	<b>SPG 24BA</b>	1731322224	24-25	
<b>SPG 25GA</b>	1731322125	<b>SPG 25BA</b>	1731322225	25-26	1
<b>SPG 26GA</b>	1731322126	<b>SPG 26BA</b>	1731322226	26-27	
<b>SPG 27GA</b>	1731322127	<b>SPG 27BA</b>	1731322227	27-28	
<b>SPG 28GA</b>	1731322128	<b>SPG 28BA</b>	1731322228	28-29	
<b>SPG 29GA</b>	1731322129	<b>SPG 29BA</b>	1731322229	29-30	
<b>SPG 30GA</b>	1731322130	<b>SPG 30BA</b>	1731322230	30-31	
<b>SPG 31GA</b>	1731322131	<b>SPG 31BA</b>	1731322231	31-32	
<b>SPG 32GA</b>	1731322132	<b>SPG 32BA</b>	1731322232	32-33	
<b>SPG 33GA</b>	1731322133	<b>SPG 33BA</b>	1731322233	33-34	
<b>SPG 34GA</b>	1731322134	<b>SPG 34BA</b>	1731322234	34-35	



IP66

NEMA 12, 4X

UL TYPE 12, 4X\*  
\*indoor only



ECOLAB

UL94-V0



RoHS COMPLIANT

