DES 24MX15

Splittable frame for cables with and without connectors

FEATURES

- Multiple configurations in the same frame
- Frame screws in AISI304 Stainless Steel
- IP54
- Strain relief acc. to EN 62444
- Sturdy construction IK10
- External gasket included



The DES 24MX15 splittable frame allows up to 60 cables with or without connectors or one or two cables up to 35mm to be routed through electrical cabinets or machines walls. The small and big grommets can be freely positioned inside the frame. The DES 24MX15 is tightened thanks to three stainless steel screws on the right side.

Material: PP+GF, halogen-free, silicone-free
Flammability: self-extinguishing acc. to UL94-V0
Temperature: -40°C... +155°C (static)

RELATED PRODUCTS

- SPP grommets (from page 65)
- SPG grommets (from page 71)

Model	Code	Some possible configurations for lower module	Dimensions (mm)	Max. cut-out (mm)	Pcs (/pack)
DES 24MX15	1731010215	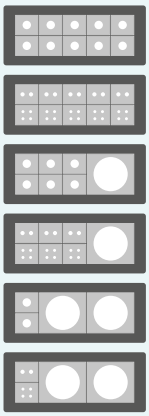	146 x 95,4	114 X 70	10
Upon request	1731991020	Set of 4 mounting screws in AISI304 with Black Geomet finishing			

Dimensions (mm)

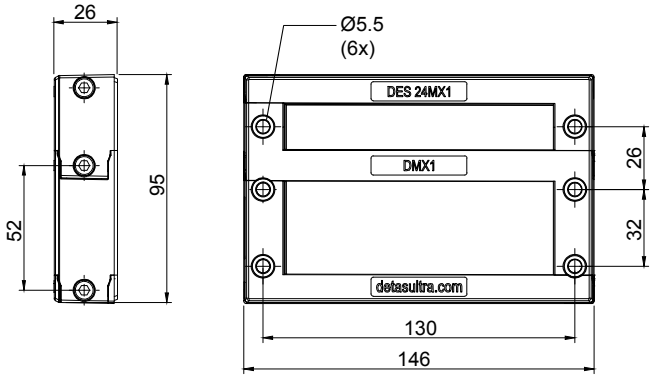

IP54 · NEMA 12 · HL3 EN 45545-2 · ECOLAB · UL94-V0 · UV ISO 4892-2A · RoHS COMPLIANT · IK10

DETASULTRA

© Detas SpA - ISO9001/ ISO14001 certified company
Via Treponti, 29 - 25086 Rezzato BS - Italy - Tel. +39 030 2594120
info@detasultra.com - **www.detasultra.com**