



Intumescent gaskets for DES family

FEATURES

- Intumescent gaskets for fire barrier
- In compliance with EN 1363-1 and EN 45545-3
- **Direct installation on DES Frames**
- Available separately from the frames


GKD intumescent gaskets series are used with DES, DES 24M frames to provide fire protection barrier according to EN 1363-1 and EN 45545-3.

They are made of a flexible, intumescent material that expands under pressure with thermal influence. In the event of a fire, the gasket becomes a solid foam which creates a pressure resistant wall.

Material: graphite-based intumescent material



	Model	Code	Dimensions (mm)		Pcs (/pack)
			L1	L2	
	GKD-24	1734080824	146	130	1
	GKD-16	1734080816	120	103	
	GKD-10	1734080810	99	33	
NEW	GKD-6	1734080806	87	55	
	GKD L4	1734080804	120	41	
	GKD-Q	1734080808	74	58	

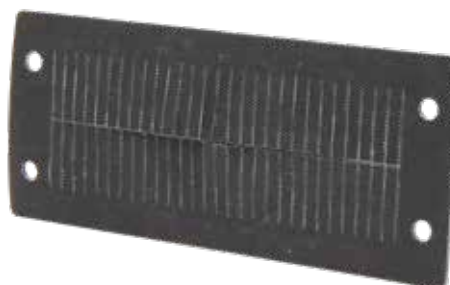

Dimensions (mm)

