



# DES 24



## Splittable frame for cables with and without connectors

### FEATURES

- Multiple configurations in the same frame
- Frame screws in AISI304 Stainless Steel
- IP66 and NEMA 4X\* certified with all configurations of grommets
- Strain relief according to EN 62444
- Sturdy construction IK10
- Overmolded gasket acc. to UL94-V0
- ATEX version on request (Group 7)
- Threaded inserts version on request
- Max 40 cables



The DES 24 cable entry system consists of a splittable frame designed to accommodate small (SPP), multiple (X) or large (SPG) grommets for cables with and without connectors. The grommets can be freely positioned into the frame.

With all combinations of grommets, single, double, quadruple, big, the IP66 and NEMA 4X\* are guaranteed.

The overmolded gasket guarantees faster installation times and the complete V0 self-extinguishing of the system.

**Material:** PP+GF, halogens and silicones free

**Flammability:** self-extinguishing acc. to UL94-V0

**Temperature:** -40°C... +155°C (static)

### RELATED PRODUCTS



- SPP grommets (from page 46)
- SPG grommets (from page 52)
- DES Cover (page 26)
- DES Flap (page 27)
- HY360 hydraulic punch driver (page 139)
- PF/PFX cable entry system plates (from page 140)
- DES caps (page 61)
- Intumescent gasket (page 127)



\* Indoor only

Model	Code	Some possible configurations	Cut-out (mm)	Pcs (/pack)
DES 24	1731010024		112 x 36	10
Upon request	1731991020	Set of 4 mounting screws in AISI304 with Black Geomet finishing		

### Dimensions (mm)

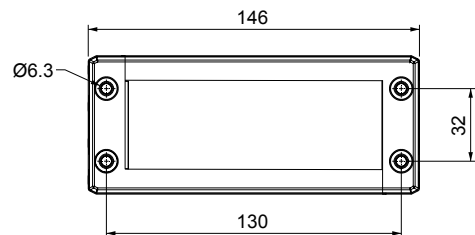

IP66

NEMA 12, 4X\*

UL TYPE 12, 4X



ECOLAB



IK10

