



DES PDM 24 ZIP



Cable entry plates with internal frame, threaded inserts and snap mounting

- ▶ Rear installation with M4 threaded inserts
- ▶ Smooth angles
- ▶ For cables without connectors
- ▶ High strain relief thanks to the double membrane
- ▶ IP66 and Nema 4X* certified
- ▶ Wall thickness for snap mounting 1,5-2 mm

NEW



Model	Code	Cable nr.	Ø Cable min/max [mm]	Dimensions [mm]		Pcs /pack
				Cut-out	Plate	
DES PDM 24 ZIP 13/G	1732026013	2 - 6 - 5 -	2,8 / 6,5 4,6 / 10,2 8,6 / 16,2			
DES PDM 24 ZIP 25/G	1732026025	12 - 7 - 6 -	2,8 / 6,5 4,4 / 9,7 6,8 / 12	112 x 18	150 x 32	10
DES PDM 24 ZIP 32/G	1732026032	21 - 8 - 6 -	2,8 / 6,5 4,6 / 10,2 6,8 / 12			

DES PDM 24 ZIP cable plates are used for cables without connectors and are characterized by an elegant design with rounded corners which avoid the accumulation of dirt.

Fixing takes place from inside the panel with 4 screws or snapped thanks to the hooks in the rear area.

There are versions for 13, 25 or 32 cables.

Technical data

Material: TPE

Flammability: self-extinguishing acc. to UL94-V0

Temperature: -40°C... +110°C (static)

Features: halogens and silicones free


Related products

IFP plugs (page 85)

HY360 hydraulic punch driver (page 129)

PF/PFX cable entry system plates (from page 130)

Dimensions [mm]

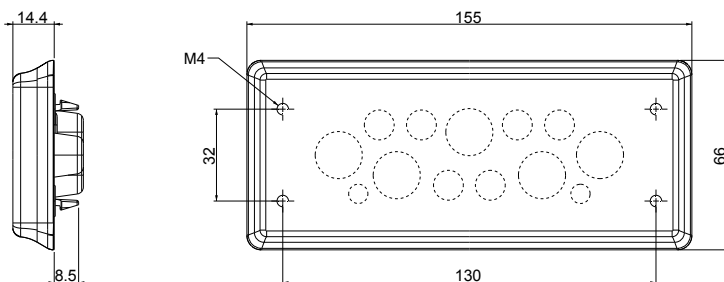

* Indoor only



IP66
IP68

NEMA
12, 4X*

UL TYPE
12, 4X



ECOLAB

UL94-V0



RoHS
COMPLIANT

© Detas SpA - ISO9001/ ISO14001 certified company

Via Trepontj, 29 - 25086 Rezzato BS - Italy - Tel. +39 030 2594120 - info@detasultra.com - www.detasultra.com

