



# DES PDM Q



## Cable entry plates with internal frame and double membrane

### FEATURES

- For large number of cables without connectors
- High strain relief thanks to the double membrane
- Cost efficient solution
- IP66 and Nema 4X\* certified
- ATEX version on request (see group 7)
- Threaded inserts version on request

The DES PDM Q is an innovative alternative to standard cable glands on electrical, electronic and telecommunication cabinets and equipment.

The cable is pushed through the front membrane, whilst the second membrane increases the strain relief and liquid resistance.

**Material:** TPE, halogens and silicones free

**Flammability:** self-extinguishing acc. to UL94-V0

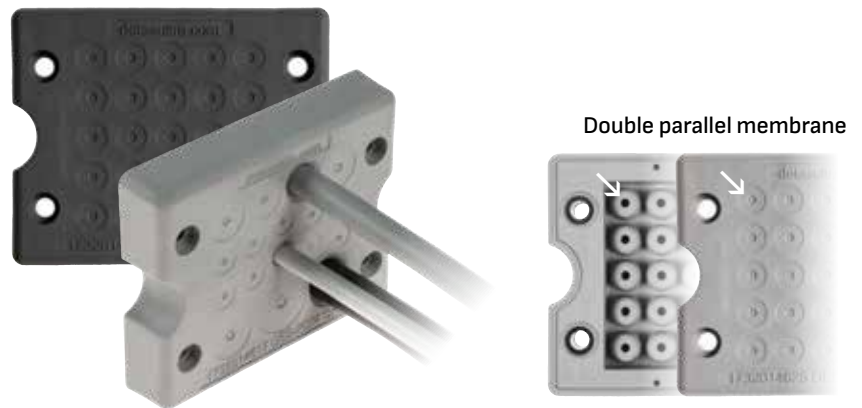
**Temperature:** -40°C... +110°C (static)


### RELATED PRODUCTS


- IFP plugs (page 97)
- DES PDM caps (page 97)
- HY360 hydraulic punch driver (page 148)


**NC:** Number of cables

**ØC:** Diameter of cables - min/max (mm)

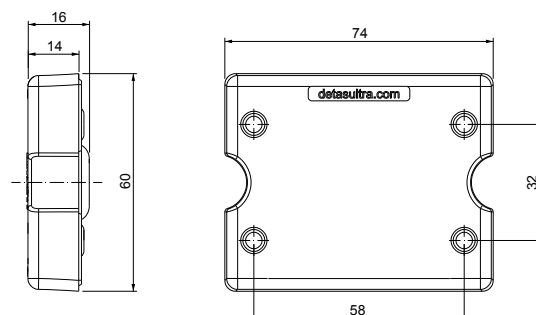


| Model  | Code       |  | NC | ØC         |
|--|------------|---|----|------------|
| ● DES PDM Q 13G                                  | 1732014613 |   | 8  | 2,8 / 6,5  |
| ● DES PDM Q 13B                                  | 1732015614 |   | 4  | 4,6 / 10,2 |
| <b>Cut-out / Plate (mm)</b><br>46 x 46 / 74 x 60 |            | <b>Pcs/pack</b><br>10   | 1  | 14,5 / 22  |

| Model  | Code       |  | NC | ØC         |
|--|------------|---|----|------------|
| ● DES PDM Q 17G                                  | 1732014617 |   | 10 | 2,8 / 6,5  |
| ● DES PDM Q 17B                                  | 1732015618 |   | 4  | 4,6 / 10,2 |
| <b>Cut-out / Plate (mm)</b><br>46 x 46 / 74 x 60 |            | <b>Pcs/pack</b><br>10   | 2  | 6,8 / 12   |
|  |            |   | 1  | 8,6 / 16,2 |

| Model  | Code       |  | NC | ØC        |
|--|------------|---|----|-----------|
| ● DES PDM Q 25G                                  | 1732014625 |   | 25 | 2,8 / 6,5 |
| ● DES PDM Q 25B                                  | 1732015626 |   |    |           |
| <b>Cut-out / Plate (mm)</b><br>46 x 46 / 74 x 60 |            | <b>Pcs/pack</b><br>10   |    |           |

### Dimensions (mm)



\* Indoor only



IP66

up to  
NEMA  
12, 4X\*

UL TYPE  
12, 4X



ECOLAB



RoHS  
COMPLIANT

