



DES PM S



Cable entry plates with double membrane

FEATURES

- For large number of cables
- High retaining force thanks to the double membrane
- Cost efficient solution
- High IP protection (IP65)

The DES PM S is an alternative to standard cable glands on electrical, electronic and telecommunication cabinets and equipment.

The cable is pushed through the front membrane, whilst the second membrane increases the strain relief and liquid resistance.

Material: TPE, halogens and silicones free

Flammability: self-extinguishing acc. to UL94-V0

Temperature: -40°C... +110°C (static)

Wall thickness: from 1,5 to 2,5 mm

RELATED PRODUCTS

- IFP plugs (page 92)




Double parallel membrane



Model	Code	Nr. Cables	Ø Cable max (mm)	Dimensions (mm)		Pcs (/pack)
				Cut-Out A1 x A2	Plate L1 x L2	
DES PM S 46/7B	1732074608	2 5	6,5 8,3	46 x 18 max. +0,5	64 x 28	10
DES PM S 46/9B	1732074610	8 1	6,5 12,1			
DES PM S 69/8B	1732076909	8	7,5	69 x 10 max. +0,5	86 x 20	
DES PM S 86/11B	1732078612	2 9	6,5 8,35	85 x 18 max. +0,5	103 x 28	
DES PM S 86/17B	1732078618	16 1	6,5 12,1			
DES PM S 112/21B	1732071222	16 4 1	6,5 8,3 12,1	112 x 18 max. +0,5	130 x 28	

Dimensions (mm)

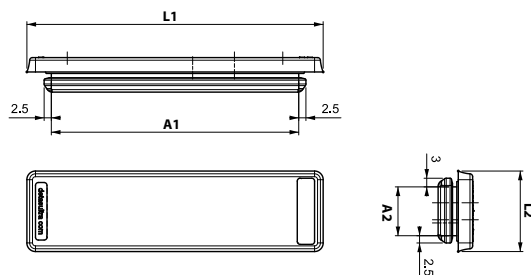

* Indoor only



IP65

NEMA 12, 4X*

UL TYPE 12, 4X



ECOLAB

UL94-V0



RoHS COMPLIANT