



ISP

Plugs for SPP and SPC series

FEATURES

- Plastic plugs for grommets, from 2 to 16 mm diameter

The ISP series plugs are designed to fit into SPP and SPC grommets with diameters from 2 to 16mm.

Material: PA66, halogens and silicones free

Flammability: self-extinguishing acc. to UL94-V2

Temperature: -40°C... +120°C (static)

RELATED PRODUCTS

- SPC grommets (from page 43)
- SPP grommets (from page 48)



| Model | Code | Diameter (mm) | Length | Pcs (/pack) |
|--------|------------|---------------|--------|-------------|
| ISP 2 | 1731040002 | 2 | 30 | 20 |
| ISP 3 | 1731040003 | 3 | | |
| ISP 4 | 1731040004 | 4 | | |
| ISP 5 | 1731040005 | 5 | | |
| ISP 6 | 1731040006 | 6 | | |
| ISP 7 | 1731040007 | 7 | | |
| ISP 8 | 1731040008 | 8 | | |
| ISP 9 | 1731040009 | 9 | | |
| ISP 10 | 1731040010 | 10 | | |
| ISP 11 | 1731040011 | 11 | | |
| ISP 12 | 1731040012 | 12 | | |
| ISP 13 | 1731040013 | 13 | | |
| ISP 14 | 1731040014 | 14 | | |
| ISP 15 | 1731040015 | 15 | | |
| ISP 16 | 1731040016 | 16 | | |

up to
IP66

UL94-V0

UV
ISO 4892-2A

RoHS
COMPLIANT

DES CAPS

Caps for splittable frames

FEATURES

- Caps with convex head
- Available with black color
- For DES splittable frames

The DES CAPS keeps the product clean from the front, preventing dirt from settling in the screw seats.

Material: PA66, halogens and silicones free


Flammability: self-extinguishing acc. to UL94-V2



RELATED PRODUCTS

- DES 24
- DES 16
- DES 10
- DES Q
- DES L2
- DES L3
- DES L4
- DES L5
- DES FT
- DES 24 M
- DES 24 MX
- DES 16 M
- DES 16 MX

Dimensions (mm)

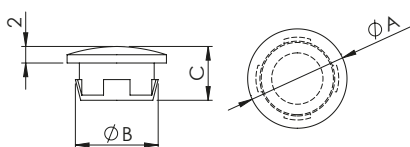

| Model | Code | Ø Hole (mm) | Dimensions (mm) | | | Pcs (/pack) |
|----------|------------|-------------|-----------------|----|-----|-------------|
| | | | A | B | C | |
| DES CAPS | 1732019983 | 9,5 | 12 | 10 | 6,5 | 50 |

RoHS
COMPLIANT