





| Model | Code | Clamping range [mm] | Dimensions [mm] | | | Pcs /pack |
|-----------|------------|------------------------|-----------------|------|----|--------------|
| | | | B | H | L | |
| MSD 1.5-3 | 1734020010 | 1,5 - 3 | 11 | 8 | 14 | 50 |
| MSD 3-6 | 1734020020 | 3 - 6 | 11 | 9,5 | 14 | |
| MSD 7-9 | 1734020030 | 7 - 9 | 11 | 13 | 14 | |
| MSD 9-12 | 1734020040 | 9 - 12 | 12 | 14,5 | 14 | |
| MSD 11-17 | 1734020050 | 11 - 17 | 13,5 | 21 | 14 | |
| MSD 17-22 | 1734020060 | 17 - 22 | 22 | 30 | 14 | |
| MSD 22-30 | 1734020070 | 22 - 30 | 22 | 36 | 14 | |
| MSD 30-37 | 1734020080 | 30 - 37 | 40 | 50,5 | 22 | |
| MSD 38-48 | 1734020090 | 38 - 48 | 40 | 60 | 22 | |

Shield clamps for DIN and Omega rails

- ▶ Suitable for a wide range of cables from 1,5 to 48 mm
- ▶ Snap-in assembly, no need to use tools
- ▶ Available with a coupling base in two widths: 14 and 22 mm
- ▶ High vibration resistance
- ▶ Possibility of obtaining shield grounding and anti-tear functions with a single device
- ▶ Ideal adherence to cable shielding
- ▶ Constant pressure of the spring on the cable sheath without having to run tests and checks

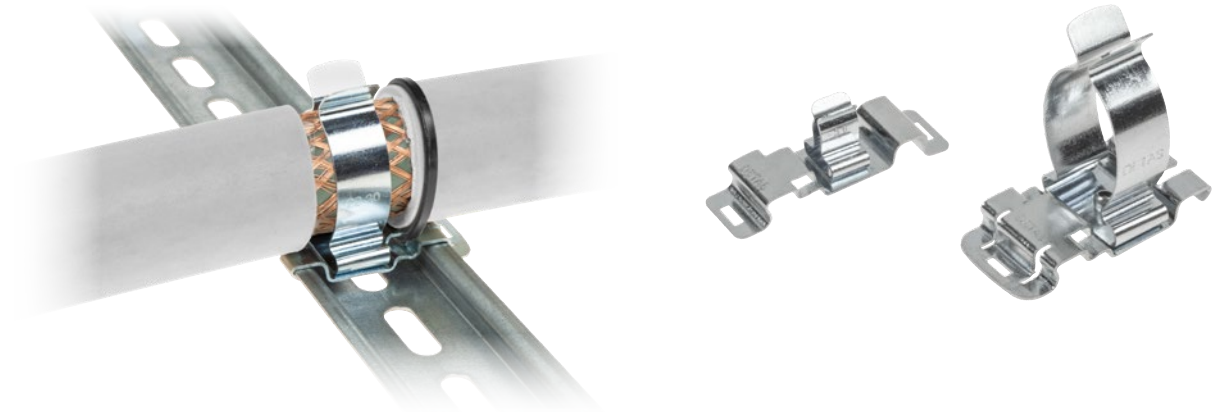

Dimensions [mm]

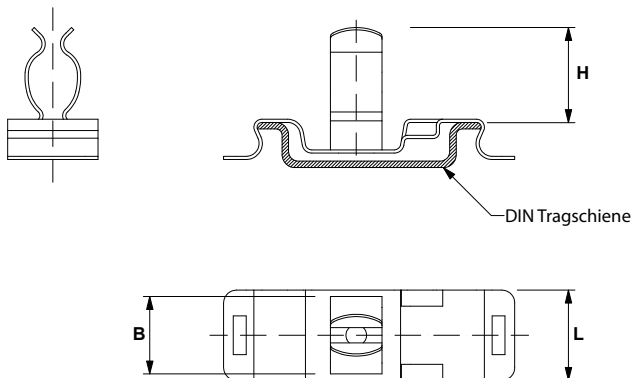

The MSD shield clamps enable the cable shield to be grounded easily and effectively. They secure the anti-tear function on the cable by fixing it with a tie.

The anti-tear function complies with EN 62444 standards.

The MSD shield clamps can be used on 35 mm DIN/Omega rails.

Technical data

Material: spring steel, zinc plated

