




MSF - MSFD

Spring shield clamps

- Suitable for a range of cables from 3 to 32 mm
- MSFD: version with base for 35mm DIN rail
- Constant pressure of the spring on the cable sheath without having to run tests and checks



MSF

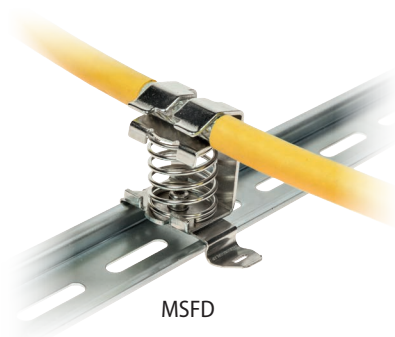

MSFD

Model	Code	Clamping range [mm]	Dimensions [mm]			Pcs /pack
			H	L	B	
MSF 3-8	1734020305	3-8	25,5	18,0	11,0	1
MSFD 3-8	1734020310	3-8	26,0	50,0	14,5	
MSF 4-13,5	1734020315	4-13,5	30,0	18,0	15,0	
MSFD 4-13,5	1734020320	4-13,5	30,0	50,5	20,5	
MSF 10-20	1734020325	10-20	40,0	26,0	25,0	
MSFD 10-20	1734020330	10-20	40,0	50,5	25,0	
MSF 15-32	1734020335	15-32	64,0	32,0	36,0	
MSFD 15-32	1734020340	15-32	64,0	50,5	34,5	


The MSF/MSFD shield clamps enable the cable shield to be grounded easily and effectively. They secure the strain relief function thanks to the spring which maintains constant pressure on the cable braid.

Technical data



Material: steel



Dimensions [mm]



MSF



MSFD

