



DES PDM 24 ATEX



Cable entry plates with internal frame and double membrane



FEATURES

- For large number of cables without connectors
- High strain relief thanks to the double membrane
- Cost efficient solution
- IP66 and Nema 4X* certified
- Threaded inserts or plastic rivets version on request

The DES PDM 24 is an innovative alternative to standard cable glands on electrical, electronic and telecommunication cabinets and equipment. The cable is pushed through the front membrane, whilst the second membrane increases the strain relief and liquid resistance.

DES PDM 24 ATEX series can be used in zone 2 and 22.


Material: TPE, halogens and silicones free

Flammability: self-extinguishing acc. to UL94-V0

Temperature: -40°C... +110°C (static)

RELATED PRODUCTS


- IFP plugs (page 92)
- DES PDM caps (page 92)
- HY360 hydraulic punch driver (page 139)
- PF/PFX cable entry system plates (from page 140)



Double parallel membrane

	Model	Code	Nr. cables	Ø Cable min/max (mm)	Dimensions (mm)		Pcs (/pack)	
					Cut-out	Plate		
NEW	DES PDM 24A/3G	1732312403	3	18 / 26	112 x 36	148,6 x 59,6	10	
	DES PDM 24A/12G	1732312412	12	9 / 16				
	DES PDM 24A/14G	1732312414	10 4	2,8 / 6,5 14,5 / 22				
	DES PDM 24A/15G	1732312415	15	6,8 / 12				
	DES PDM 24A/16G	1732312416	8 4 2 2	2,8 / 6,5 4,4 / 9,7 8,6 / 16,2 14,5 / 22				
DES PDM 24A/17G	1732312417		6 6 5	2,8 / 6,5 4,6 / 10,2 8,6 / 16,2				
DES PDM 24A/25G	1732312425		12 7 6	2,8 / 6,5 4,4 / 9,7 6,8 / 12				
DES PDM 24A/26G		1732312426	26	4,6 / 10				
NEW	DES PDM 24A/32G	1732312432	21 8 3	2,8 / 6,5 4,6 / 10,2 6,8 / 12				
	DES PDM 24A/42G		1732312442	42				2,8 / 6,5
	DES PDM 24A/124G		1732312445	120 4				1,75/4,7 2,3/6

Dimensions (mm)

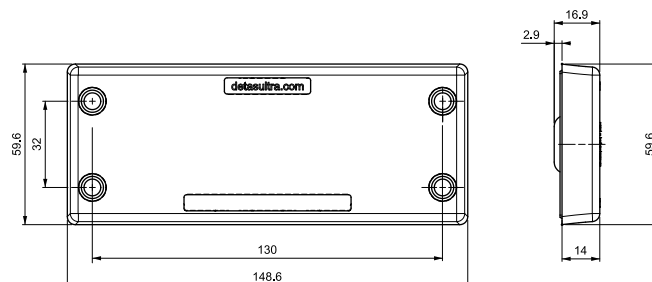

* Indoor only



IP66

NEMA 12, 4X*

UL TYPE 12, 4X



ECOLAB



RoHS COMPLIANT






DES PDM 24 ATEX



Cable entry plates with internal frame and double membrane

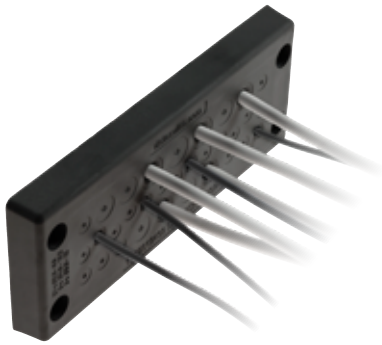

FEATURES

- For large number of cables without connectors
- High strain relief thanks to the double membrane
- Cost efficient solution
- IP66 and Nema 4X* certified
- Threaded inserts or plastic rivets version on request

The DES PDM 24 is an innovative alternative to standard cable glands on electrical, electronic and telecommunication cabinets and equipment. The cable is pushed through the front membrane, whilst the second membrane increases the strain relief and liquid resistance.

DES PDM 24 ATEX series can be used in zone 2 and 22.

Material: TPE, halogens and silicones free


Flammability: self-extinguishing acc. to UL94-V0

Temperature: -40°C... +110°C (static)

Model	Code	Nr. Cables	Ø Cable min/max (mm)	Dimensions (mm)		Pcs (/pack)
				Cut-out	Plate	
NEW DES PDM 24A/3B	1732313403	3	18 / 26	112 x 36	148,6 x 59,6	10
DES PDM 24A/12B	1732313412	12	9 / 16			
DES PDM 24A/14B	1732313414	10 4	2,8 / 6,5 14,5 / 22			
DES PDM 24A/15B	1732313415	15	6,8 / 12			
DES PDM 24A/16B	1732313416	8	2,8 / 6,5			
		4	4,4 / 9,7			
		2	8,6 / 16,2			
DES PDM 24A/17B	1732313417	2	14,5 / 22			
		6	2,8 / 6,5			
		6	4,6 / 10,2			
DES PDM 24A/25B	1732313425	5	8,6 / 16,2			
		12	2,8 / 6,5			
		7	4,4 / 9,7			
NEW DES PDM 24A/26B	1732313426	6	6,8 / 12			
		26	4,6 / 10			
		21	2,8 / 6,5			
DES PDM 24A/32B	1732313432	8	4,6 / 10,2			
		3	6,8 / 12			
		42	2,8 / 6,5			


RELATED PRODUCTS

- IFP plugs (page 92)
- DES PDM caps (page 92)
- HY360 hydraulic punch driver (page 139)
- PF/PFX cable entry system plates (from page 140)



Double parallel membrane

Dimensions (mm)

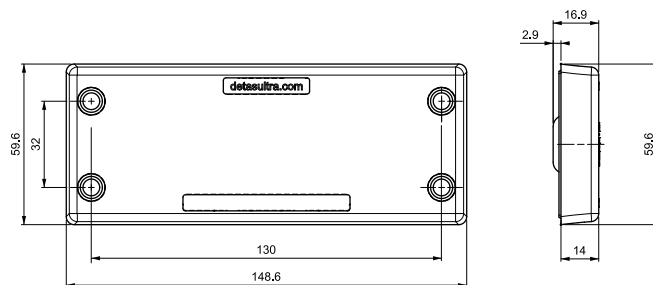

* Indoor only



IP66

NEMA 12, 4X*

UL TYPE 12, 4X



ECOLAB



RoHS COMPLIANT

