



# DES PDM S ATEX



## Cable entry plates with internal frame and double membrane

### FEATURES

- For several number of cables in a limited space
- High strain relief thanks to the double membrane
- Cost efficient solution
- High IP grade (IP66)
- Threaded inserts or plastic rivets version on request



Double parallel membrane



The DES PDM S is an innovative alternative to standard cable glands on electrical, electronic and telecommunication cabinets and equipment.

The cable is pushed through the front membrane, whilst the second membrane increases the strain relief and liquid resistance.

**DES PDM S ATEX series can be used in zone 2 and 22.**

**Material:** TPE, halogens and silicones free

**Flammability:** self-extinguishing acc. to UL94-V0


**Temperature:** -40°C... +110°C (static)

### RELATED PRODUCTS

- IFP plugs (page 92)
- DES PDM caps (page 92)

| Model              | Code       | Nr. Cables | Ø Cable min/max (mm) | Dimensions (mm) |          | Pcs (/pack) |
|--------------------|------------|------------|----------------------|-----------------|----------|-------------|
|                    |            |            |                      | Cut-out         | Plate    |             |
| DES PDM S 112A/7G  | 1732321127 | 7          | 6,8 / 12             | 112x18          | 150 x 32 | 10          |
| DES PDM S 112A/22G | 1732321122 | 22         | 3,2 / 6,5            |                 |          |             |
| DES PDM S 112A/7B  | 1732322127 | 7          | 6,8 / 12             |                 |          |             |
| DES PDM S 112A/22B | 1732322122 | 22         | 3,2 / 6,5            |                 |          |             |

### Dimensions (mm)

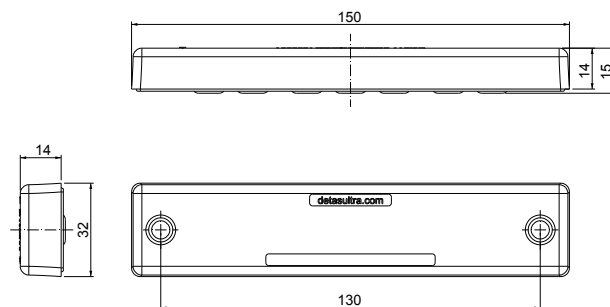

IP66

NEMA 12

UL TYPE 12



ECOLAB



RoHS COMPLIANT

