



DES PDM 24 ZIP



Cable entry plates with internal frame, threaded inserts and snap mounting

FEATURES

- Rear installation with M4 threaded inserts
- Smooth angles
- For cables without connectors
- High strain relief thanks to the double membrane
- IP66 and Nema 4X* certified
- Wall thickness for snap mounting 1,5–2 mm



DES PDM 24 ZIP cable plates are used for cables without connectors and are characterized by an elegant design with rounded corners which avoid the accumulation of dirt.

Fixing takes place from inside the panel with 4 screws or snapped thanks to the hooks in the rear area.

There are versions for 13, 25 or 32 cables.

Material: TPE, halogens and silicones free

Flammability: self-extinguishing acc. UL94-V0



Temperature: -40°C... +105°C (static)

RELATED PRODUCTS

- IFP plugs (page 92)
- HY360 hydraulic punch driver (page 139)
- PF/PFX cable entry system plates (from page 140)

Model	Code	Nr. cables	Ø Cable min/max (mm)	Dimensions (mm)		Pcs (/pack)
				Cut-out	Plate	
DES PDM 24 ZIP 13/G	1732026013	2	2,8 / 6,5	112 x 18	150 x 32	10
		6	4,6 / 10,2			
		5	8,6 / 16,2			
DES PDM 24 ZIP 25/G	1732026025	12	2,8 / 6,5	112 x 18	150 x 32	10
		7	4,4 / 9,7			
		6	6,8 / 12			
DES PDM 24 ZIP 32/G	1732026032	21	2,8 / 6,5	112 x 18	150 x 32	10
		8	4,6 / 10,2			
		3	6,8 / 12			

Dimensions (mm)

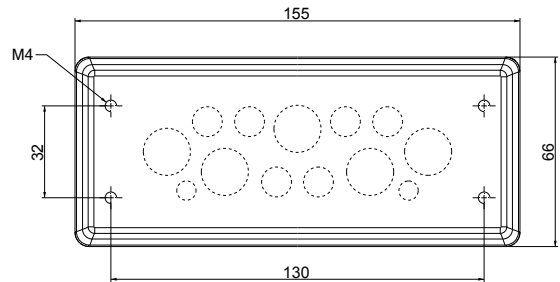

* Indoor only



IP66
IP68

NEMA
12, 4X*

UL TYPE
12, 4X



ECOLAB

