



# SPP P




## SPP multi-range grommets with pyramidal shape



SPP PG



SPP PG T

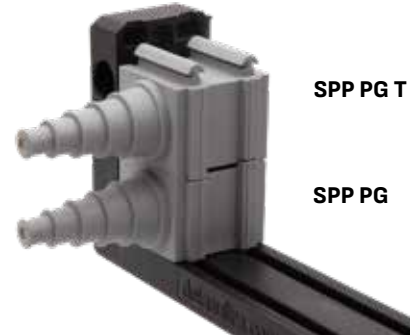

SPP PG T

SPP PG

### FEATURES

- Universal solution for cables without connectors from 3 to 14mm diameter
- Can be used on all DES Frames and divisible cable glands
- IP66
- UL94-V0 for both grey and black colors

The SPP P grommets are suitable for cables without connectors. They are used cutting the cone corresponding to the diameter of the cable. The cable is then routed into the grommet where the internal shape is increasing the strain relief. It is also possible to secure the cable with a cable tie. The T version can be installed in the upper line of the DES series.





**Material:** TPE, halogens and silicones free

**Flammability:** self-extinguishing acc. to UL94-V0


**Temperature:** -40°C... +110°C (static)

### RELATED PRODUCTS

- DES 24
- DES 16
- DES 10
- DES Q
- DESPRED
- DESCLICK
- DES 24M
- DES 24MX15
- DES 24MX
- DES 16M
- DES 16MX

Model	Code	Ø Cable min/max (mm)	Pcs (/pack)
 SPP PG	1731020650	3 - 14	10
 SPP PB	1731020652		
 SPP PG T	1731020651		
 SPP PB T	1731020653		

### Dimensions (mm)

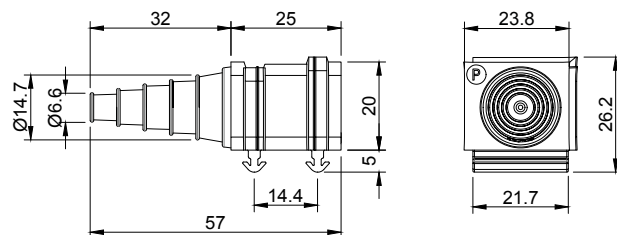

\* Indoor only



IP66

NEMA 12, 4X\*

UL TYPE 12, 4X



ECOLAB

