




OSF50









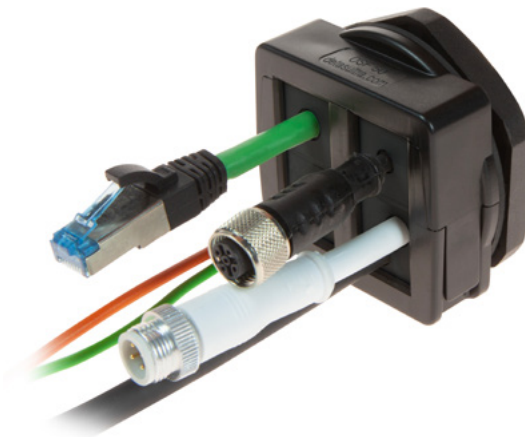






Divisible cable gland with locknut

NEW

- ▶ M50 metric size
- ▶ Without screws
- ▶ IP54
- ▶ Locknut and gasket included
- ▶ Suitable for small or big grommets
- ▶ Available colors: grey and black



Model	Code	Max. grommet sizes				Cut-out Ø [mm]	Pcs pack
 OSF50G	1731052350	 	 	 	 	50,5	10
 OSF50B	1731052450	SPC 14	SPC 2x6	SPC 4x6	SPL 29		
Some possible configurations							
  							

OSF 50 is a divisible cable gland with metric thread especially designed for cables with connectors.

Is it possible to route up to 16 cables with connectors.

OSF 50 can be equipped in the same frame with SPC grommets with single or multiple holes from 2 to 14 mm diameter or with SPL grommets from 12 to 29 mm diameter. Both black and grey frame and grommets comply with UL94V0.

Technical data

Material: PC

Flammability: self-extinguishing acc. to UL94-V0

Temperature: -40°C... +130°C (static)

Features: halogens and silicones free

Related products



SPC grommets (page 39)

SPL grommets (page 41)

HY360 hydraulic punch driver (page 129)

Divisible locknuts (page 37-38)

Dimensions [mm]

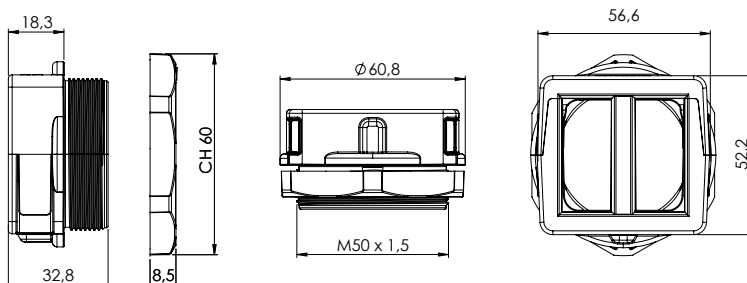

IP54

NEMA
12



IK10